


# SOUND PROJECTS

BY MASTER BLASTER

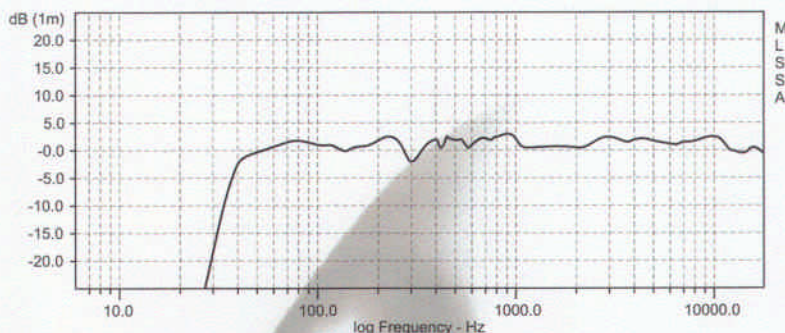

## Specifications:

measurements	: height 55cm x width 31 cm
weight	: 16 kg
enclosure	: aluminium moulding compound (90% recyclable)
speakers	: 1x 1" silk dome tweeter ferrofluid cooled 2x 5 1/2" polyprop dome
system	: 2 1/2 way bassreflex, 4th order
frequency response	: 30-20.000 Hz
cross over	: 3 kHz
amplifier	: 2x300 W @ 8 Ohm
protection against	: input overdrive/DC turn-on and -off transients
LED indication	: power-on, input overdrive
input	: XLR -3 IEC, impedance 10k Ohm
protection threshold	: 0 dBV
mains voltage	: 230 V (+10%/-20%) @ 50 Hz
mains connector	: IEC -20
power consumption	: <20 VA idling 220 VA RMS max.
max SPL peak	: 112 dB
safe operating temp.	: -20°C to +45°C ambient

## Applications:

- \* Studio Monitor
- \* Conference application
- \* Pub & Club installation
- \* Home application

## Features:

- \* High reliability, dedicated built in power -amps
- \* Virtually inaudible speaker protection (A.L.C.)
- \* Flat frequency response over a wide area
- \* Optional wall mounting
- \* Available in every desired colour

YOUR DEALER

MASTER BLASTER B.V.  
P.O. BOX 360, 1217 PM Hilversum Holland  
TEL: +31 (0) 35 -6213233 FAX: +31 (0) 35-6215455

**SUPERIOR SOUNDREINFORCEMENT**