
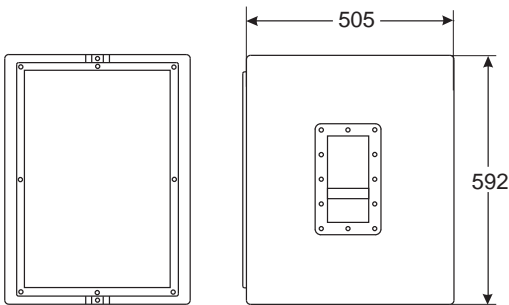



# SOUND PROJECTS

## Easy Tour

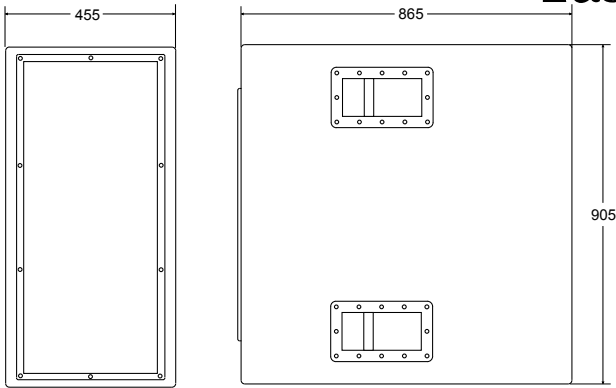

### Electrical specifications

- Drivers: 2x15", 10", 1.5"
- Transient output: 1500W
- Amplifier(s): 4x MA4-technology (each side!)
- Crossover 4th order: 320/1600Hz
- Low-pass 4th order: -
- Filter subsonic: 30Hz, 2nd order
- Filter ultrasonic: 20.000Hz 1st order

### Protection

- D.A.L.C. (dual audiologic control)
- Fast quad driver-relais turn on/off
- Transient (soft power-up)
- DC-voltage short-circuit
- LED status indication: power-on/D.A.L.C/protect/signal-present
- Input impedance: 20 kOhms balanced, 10 kOhms unbalanced
- Output impedance: hard-wired to input
- Protection threshold: +4dBu
- Mains voltage: 230V (100V optional) +5%, -10%
- Mains frequency: 50/60 Hz
- Power cons. Idle: < 50VA
- RMS Full load: 1200VA

### Acoustical specifications

- Max. SPL continuous: 134dB@1m
- Calculated peak/longterm: 138dB@1m
- Freq. response: 30-20.000Hz
- Coverage angle: 85 H, 30 V

### Additional descriptive data

- Cabinet construction: crossgrain laminated multiplex
- Finish: non reflective sturdy carpet
- Weight: Sub-low 84kg  
Top 25kg
- Size WxHxD in cm:  
Sub-low: 45x90x60 rectangular  
Top: 45x90x50 trapezoid
- Rigging points: Quick-Rig? (top), recessed stand adapter
- Audio connectors in: IEC XLR-3 (pin 2 hot), Speakon to top
- Main connectors: CEE
- Max. operating temp.: -10 to 45 C ambient

### Applications

- Bands
- Performing Acts / Tape acts
- Small theatre systems
- Live/Disco/Club
- Drum fill monitors

Specifications subject to change without notice