

S O U N D P R O J E C T S

SPX-4



The sound reinforcement system shall hold a 1.4" HF driver on a horn with a horizontal dispersion of 85 degrees and a vertical dispersion of 30 degrees and a low-weight neodymium 12-inch driver on a balance-drive horn loading system, powered by a 1200W amplifier. The maximum peak output of the total system shall be 138dB at 1m. The system shall have a 60Hz-20kHz frequency range. The system shall have a 85 degrees horizontal and 30 degrees vertical coverage angle.

The cabinet shall be constructed of cross grain laminated lightweight multiplex, covered by a protective 2 component polyurethane coating. The total system weight including amplifiers and audio control shall be 45kg only. It shall have an IEC XLR-3 audio in and output connector and a powercon in and thru mains connector.

The system shall be a self-powered design holding its own protective audio logic control electronics and amplifiers within the cabinet.

Acoustical specifications:

- Drivers: 1 x 1.4", 1 x 12" high power, low weight, neodymium design.
- Freq. response: 60Hz-20kHz
- Max. peak SPL @1m: 138dB c.f. 2 (6 dB)
- Coverage angle: 85H x 30V

Electrical specifications:



- Amplifier(s): CCD™ technology
- Output: 1200W sine (DALC limited)
- Crossover: 1.4 kHz, 4th order
- Filter subsonic: 60Hz, 2nd order
- Input impedance: 20 kOhms balanced, 10 kOhms unbalanced
- Output impedance: hard-wired to input
- *Power consumption.*
- Mains voltage: 230V (other on request)
- Mains frequency: 50/60 Hz
- Idle: < 50VA
- Full load: 1200 VA. DALC limited Ref. to continuous pink noise signal (6 dB crest factor within the specified range)

- *Protection*
- D.A.L.C. (Dual AudioLogic Control)
- Protection threshold: +4dBu
- Transient (soft power-up)
- DC-voltage short-circuit
- LED indication: power-on/signal/protect

Additional descriptive data:

- Cabinet construction: cross grain laminated multiplex
- Finish: Nano-armor™ coating
- Weight: 45kg
- Size WxHxD (mm): 450x1200x600 (trapezoid)
- Rigging points: Integrated SPX flypoints, recessed pole mount.
- Audio connectors: IEC XLR-3 in/out
- Main connectors: powercon in, powercon out
- Max. operating temp.: -10 to 40 C ambient

Specifications subject to change without notice

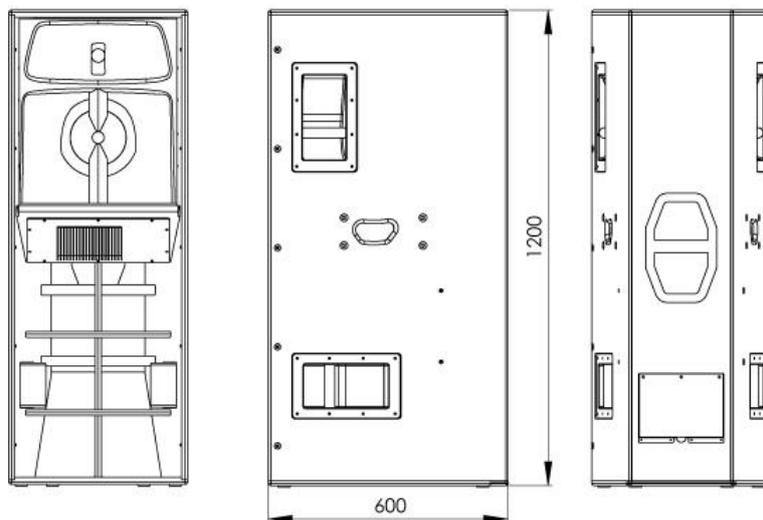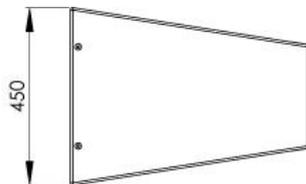

S O U N D P R O J E C T S

SP2-15



The sound reinforcement system shall hold two low-weight neodymium 15-inch drivers, powered by a 2500W class-D amplifier. The maximum peak output of the total system shall be 136dB at 1m. The system shall be switchable between full range or the 30-60Hz frequency range. The system coverage angle shall be omni-directional.

The cabinet shall be constructed of cross grain laminated multiplex, covered by a protective 2 component polyurethane coating. The total system weight including amplifiers and audio control shall be 86kg only. It shall have an IEC XLR-3 audio in and output connector and a powercon in and thru mains connector.

The system shall be a self-powered design holding its own protective audio logic control electronics and amplifiers within the cabinet.

Acoustical specifications:

- Drivers: 2 x 15" high power, low weight, neodymium design.
- Freq. response: 30-60Hz/FR (switch)
- Max. peak SPL @1m: 136dB c.f. 2 (6 dB)
- Coverage angle: omni-directional

Electrical specifications:

- Amplifier(s): CCD™ technology
 - Output: 2500W sine (DALC limited)
 - Low pass 4th order: 60 Hz
 - Filter subsonic: 30Hz, 2nd order
 - Input impedance: 20 kOhms balanced, 10 kOhms unbalanced
 - Output impedance: hard-wired to input
- Power consumption.*
- Mains voltage: 230V (other on request)
 - Mains frequency: 50/60 Hz
 - Idle: < 50VA
 - Full load: 1200 VA. DALC limited Ref. to continuous pink noise signal (6 dB crest factor within the specified range)

- Protection

- D.A.L.C. (Dual AudioLogic Control)
- Protection threshold: +4dBu
- Transient (soft power-up)
- DC-voltage short-circuit
- LED indication: power-on/signal/protect/switch (60Hz/FR)

Additional descriptive data:

- Cabinet construction: cross grain laminated multiplex
- Finish: Nano-armor™ coating
- Weight: 86kg
- Size WxHxD (mm): 450x1200x600 (730)
- Rigging points: M20 Polemount
- Audio connectors: IEC XLR-3 in/out
- Main connectors: powercon in, powercon out
- Max. operating temp.: -10 to 40 C ambient

Specifications subject to change without notice

